


Wskazówki montażowe

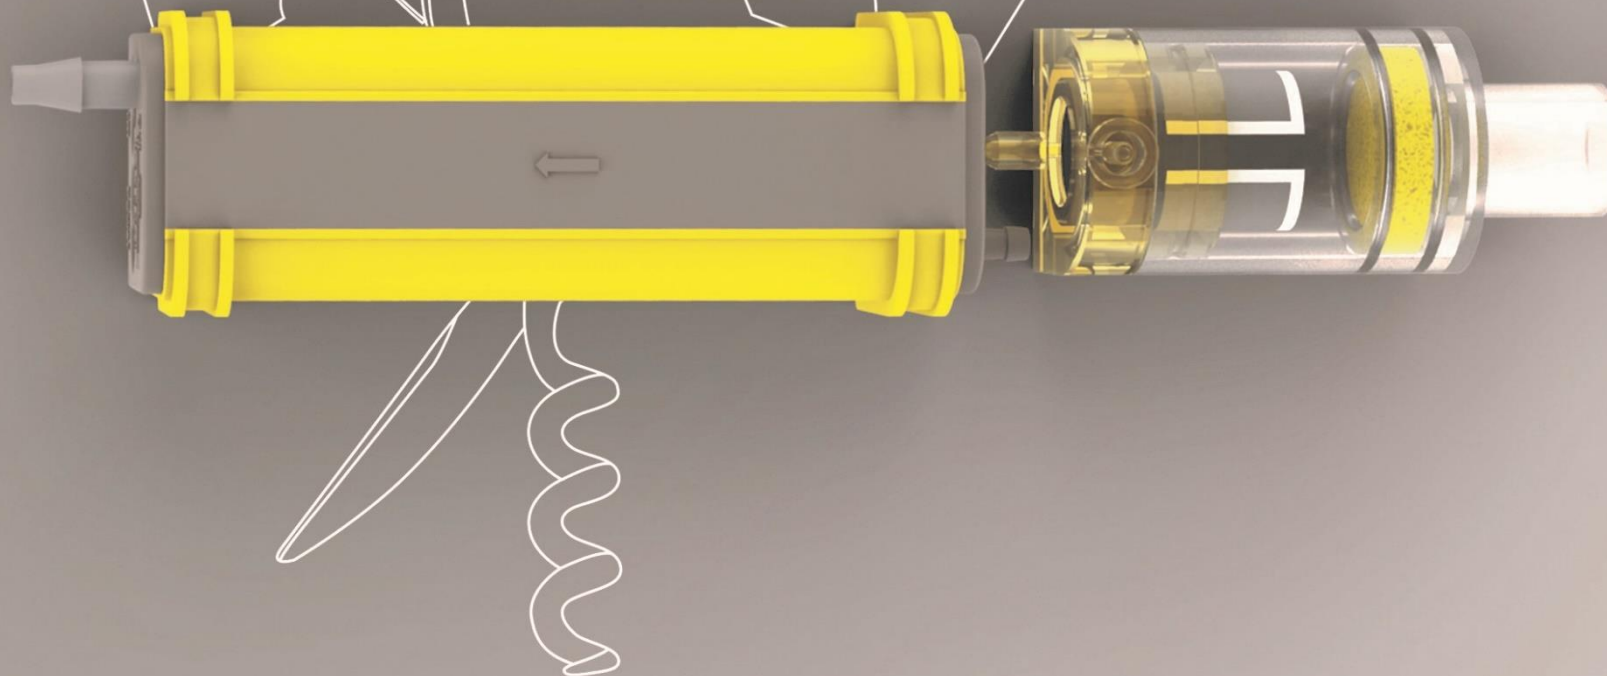

HVAC/R
Service Products

REFCO

Combi

3004046



Condensate Pump

Kondensatpumpe
Pompe de relevage de condensats
Pompe acqua condensa
Bomba de condensado

Quiet mode:

Installer configurable pump performance using dip-switches to optimize each individual installation for the best performance and sound parameters.



Diagnostic LED:

Patented two color long-life LED to ensure correct initial installation and to assist in diagnostics on future service calls.



USB connection:

Patented access for wholesalers or installers to review pump history.



Universal application:

Widest application range for interior/exterior mount pumps in the market from 6,000 Btu/H to 120,000 Btu/H (1.75kW to 35kW).



Integrated replaceable 10 A fuse:

Factory installed replaceable 5 x 20mm 10A fuse.



Zamontuj wszystkie komponenty z opakowania




Upewnij się, że kabel
sygnałowy jest włożony
we właściwej pozycji

1a

Horizontal installation



**Remove plug and
install vent tube.**

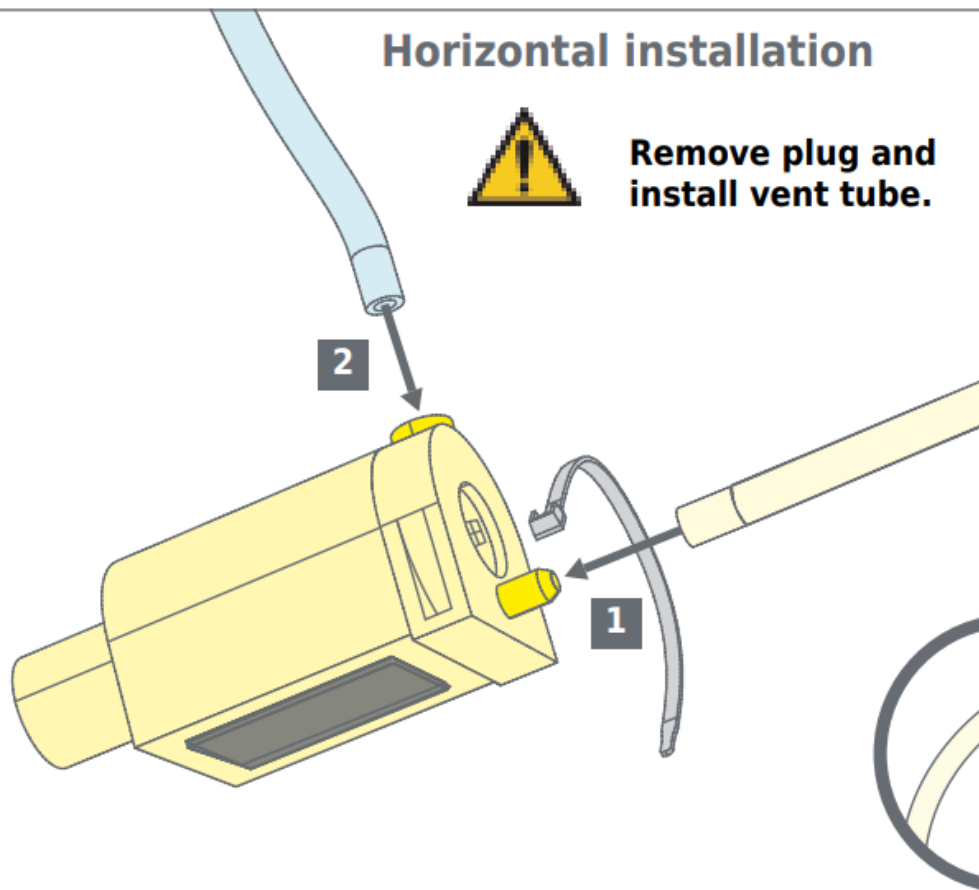


1b


Vertical installation



**Leave silicone plug
in water sensor.**

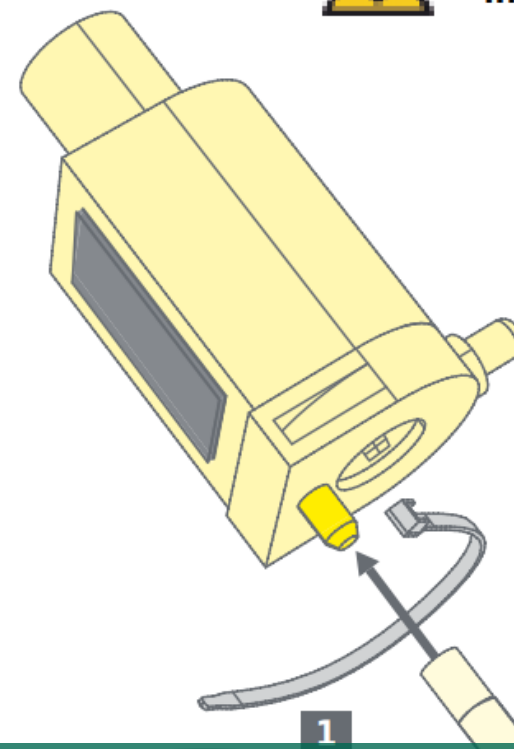

Pamiętaj o odpowietrzeniu
przy montażu w poziomie

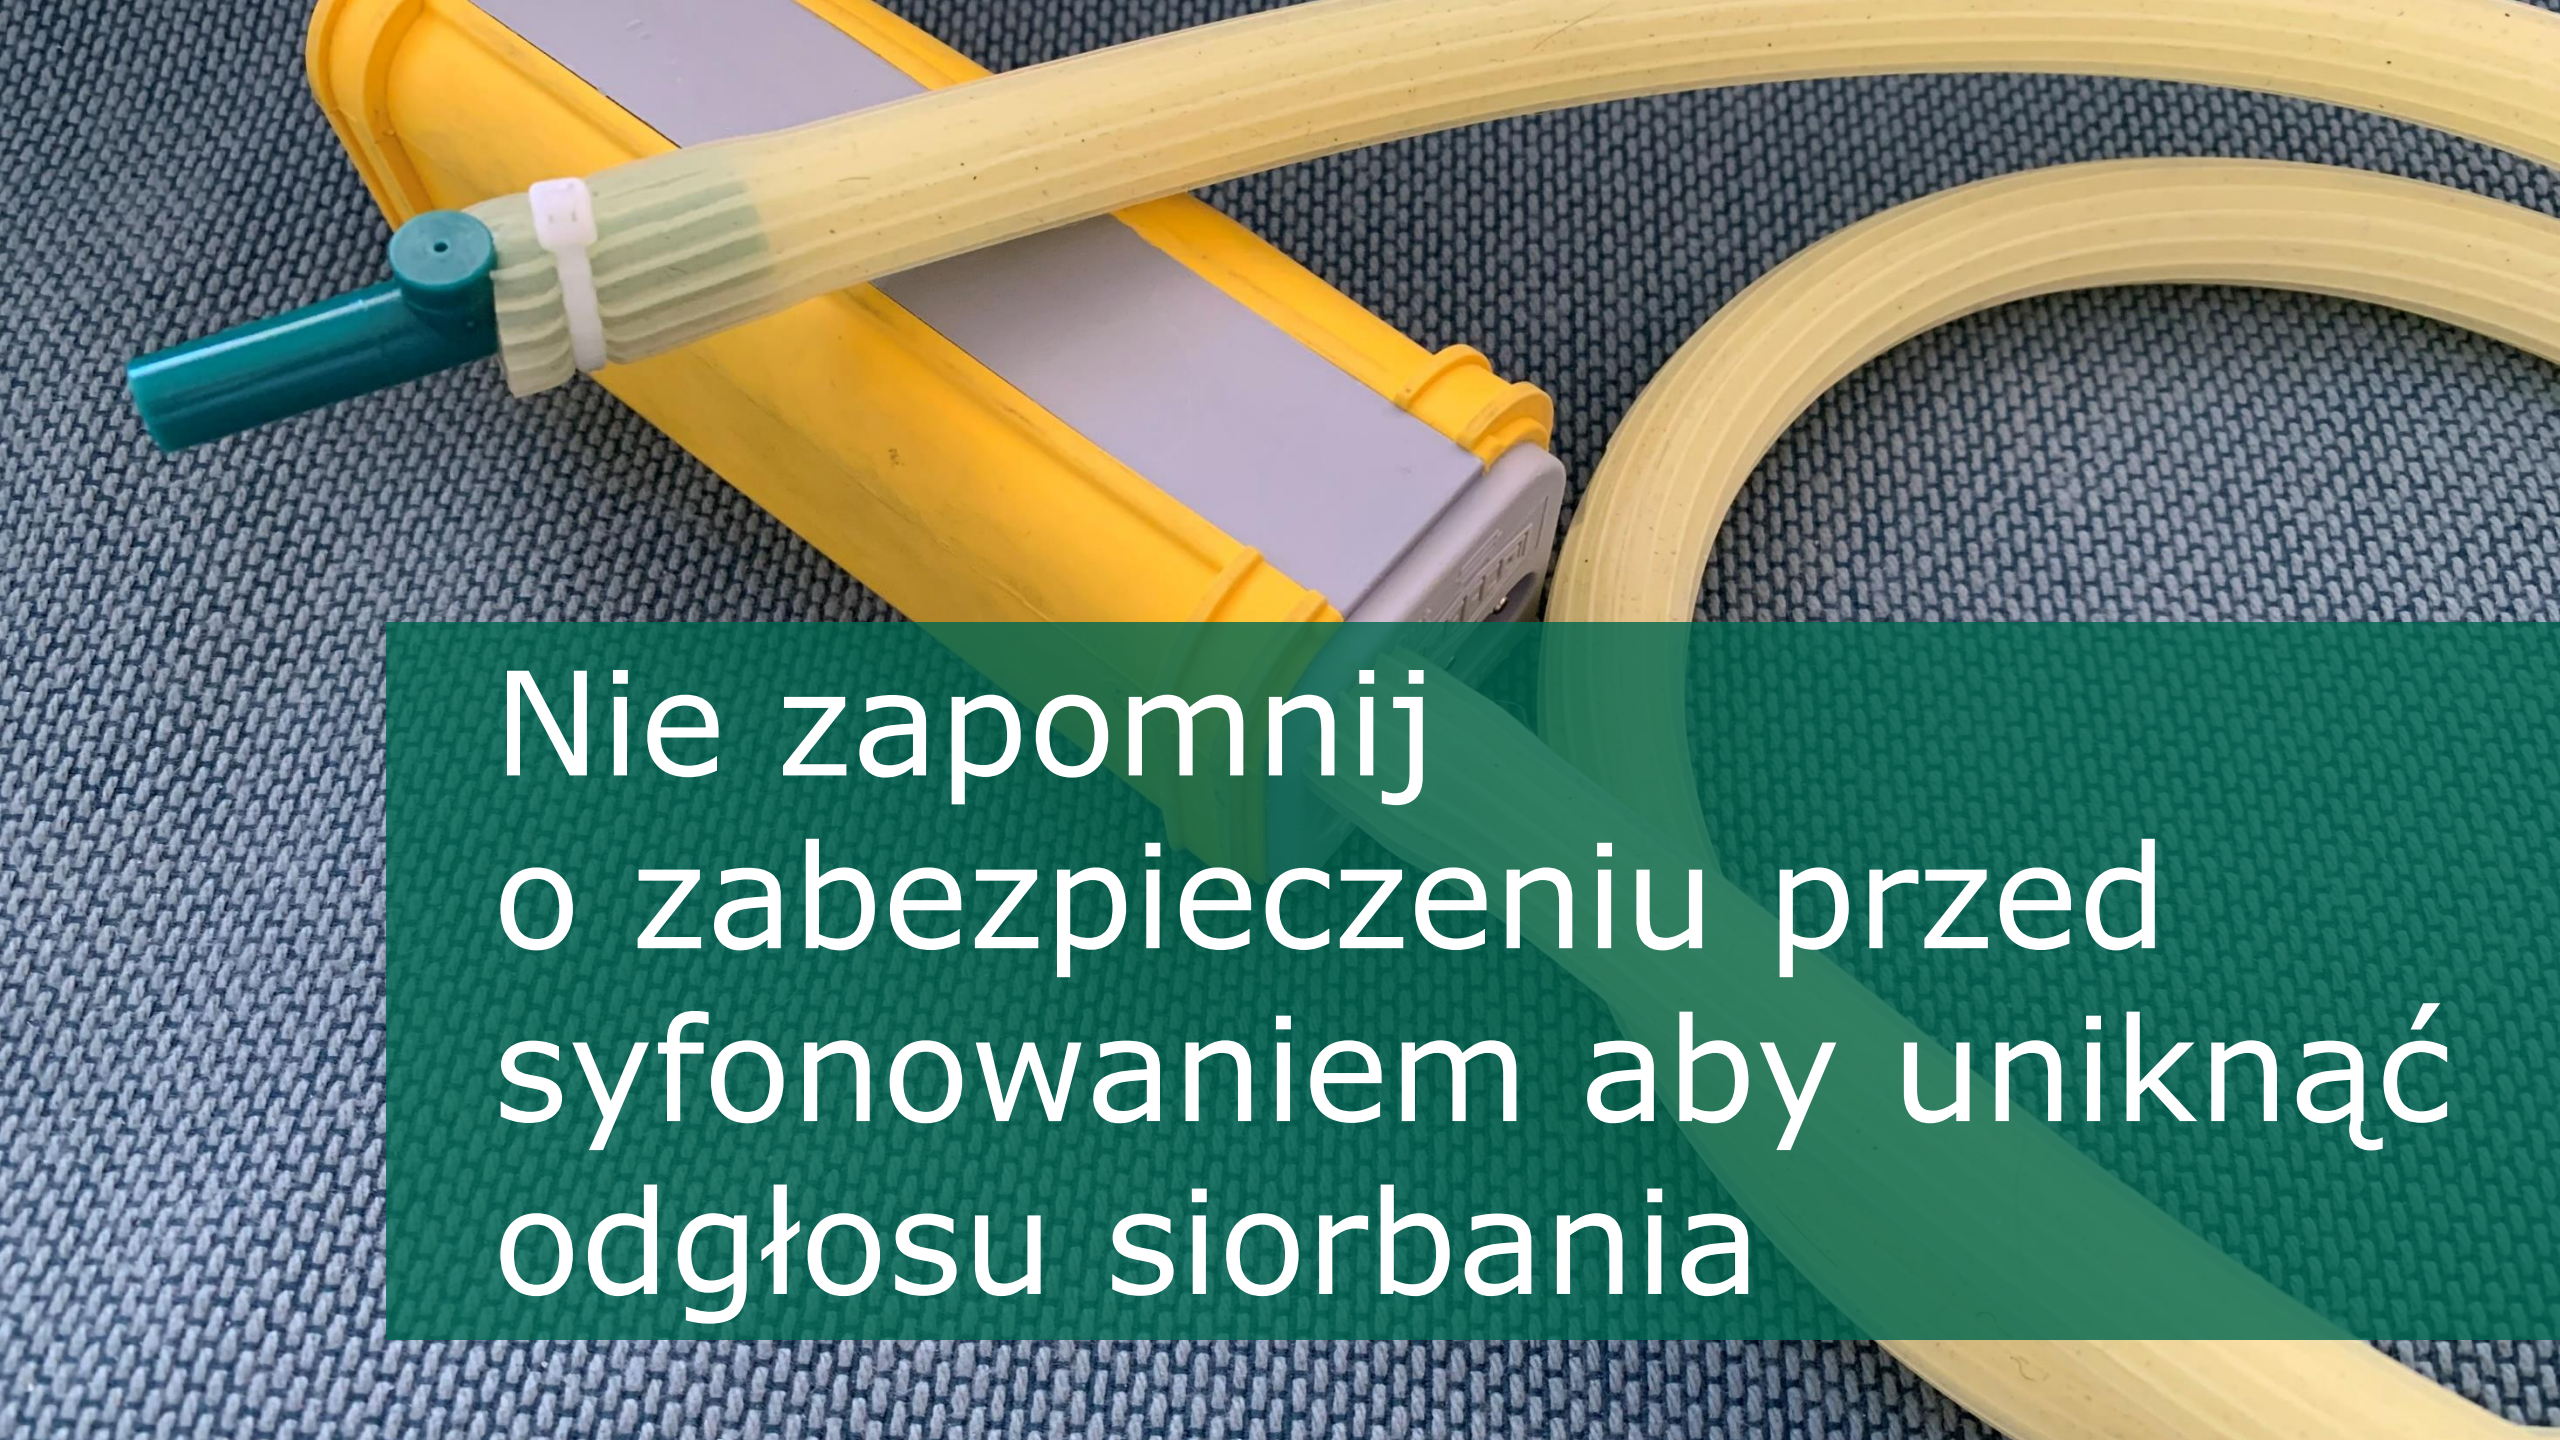

Nie zapomnij
o zabezpieczeniu przed
syfonowaniem aby uniknąć
odgłosu siorbania

Wykorzystaj kabel
alarmowy do ochrony
przed zalaniem



Dopasuj wydajność do
konkretnego obciążenia



Tryby wydajności

- niska: 5.3 kW
- średnia niska: 12.0 kW
- średnia wysoka: 21.1 kW
- wysoka: 35.0 kW



Wyczyść czujnik podczas
serwisowania klimatyzatora